


This 90 degree spindle is compact and powerful for constant high speed cutting. Low vibration and air consumption governed turbine motor maintains high speed and torque under load at 65,000RPM. Few moving parts give you high reliability.

## Model 601XJS

0.50 hp  
0.32 kW

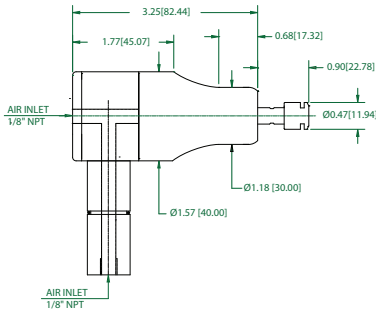

1/4"		6mm	
Speed	Part #	Speed	Part #
40,000 rpm	63100	40,000 rpm	63101
50,000 rpm	63102	50,000 rpm	63103
65,000 rpm	63104	65,000 rpm	63105

**Weight: 22.4 oz/ 0.64 kg**

**Standard Equipment:** Spindle, combo filter extractor, collet, wrenches, plug (for alternate air inlet not in use) and carrying case.

Factory installed 90 degree mounting integrated shank. ER11 collet system standard (1/4" or 6mm collet standard - other sizes optional). Oil free 90PSI / 6.2BAR, clean, dry air supply.

General Specifications	601XJS		
	CE	MADE IN THE USA	
Speed RPM	40,000	50,000	65,000
Power Rating HP (KW)	0.3 (.22)	0.4 (.30)	0.5 (0.32)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	5 (2.40)	6 (2.80)	6 (2.80)
Air Consumption-Working cfm (L/s)	7 (3.30) - 10 (4.72)		
Sound Level	Less Than 67 dBa		
Standard Shank Capacity	1/4" (6mm)		

### Accessories

High Flow Filter /  
Regulator / Oil Extractor

### Part#

30008