


For a finger or palm held tool the **0145SSV** allows the user exceptionally fine control for close proximity work. This well balanced, low vibration **0145SSV** tool is ideal. For polishing at 40,000 rpm or marking or deburring at 65,000, this tool is comfortable and exact. The motor is in the head. There are no gears. Precise and with low vibration. No maintenance or lubrication - ever.

Model 0145SSV

0.2 hp
0.15 kW

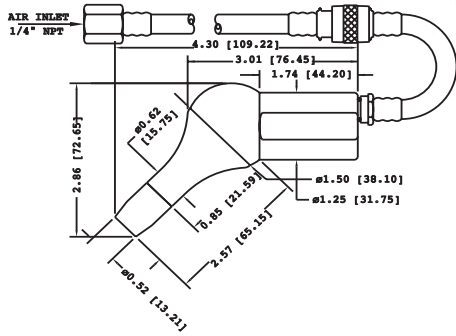


1/8"	No Brake	With Brake
Speed	Part #	Part #
40,000 rpm	35042	35046
50,000 rpm	35052	35056
65,000 rpm	35062	35066

3mm	No Brake	With Brake
Speed	Part #	Part #
40,000 rpm	35043	35047
50,000 rpm	35053	35057
65,000 rpm	35063	35067

Weight: 6oz / 0.17kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	CE 0145SSV 		
Speed RPM	40,000	50,000	65,000
Power Rating HP (KW)	.15 (.11)	2 (.15)	2 (.15)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption - Idle cfm (L/s)	3.2 (1.51)	4 (1.88)	4 (1.88)
Air Consumption - Working cfm (L/s)	4.7 (2.22) - 7 (3.30)		
TR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/8" (3mm)		

Accessories

Accessories	Part#
Low Flow Filter	30002
Low Flow Filter / Regulator	30001
Collet Guard	15125
Foot Pedal Control	30030
5' Air Supply Assy w/Fitting	32107

