
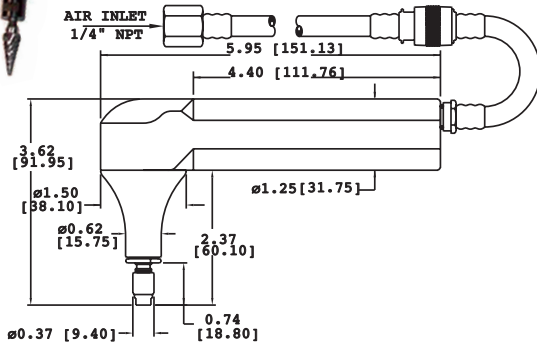


For a finger or palm held tool the **0190SV** allows the user exceptionally fine control for close proximity work. This well balanced, low vibration **0190SV** tool is ideal. For polishing at 40,000 rpm or marking or deburring at 65,000, this tool is comfortable and exact. The motor is in the head. There are no gears. Precise and with low vibration. No maintenance or lubrication - ever.

Model 0190SV

0.2 hp
0.15 kW

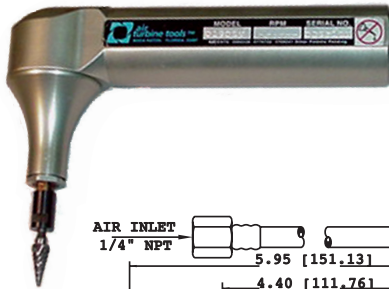

1/8"	No Brake
Speed	Part #
40,000 rpm	35140
50,000 rpm	35150
65,000 rpm	35160

3mm	No Brake
Speed	Part #
40,000 rpm	35141
50,000 rpm	35151
65,000 rpm	35161

Weight: 10 oz / .28 kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	0190SV		
	CE	MADE IN THE USA	
Speed RPM	40,000	50,000	65,000
Power Rating HP (KW)	.15 (.11)	.2 (.15)	.2 (.15)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	3.2 (1.51)	4 (1.88)	4 (1.88)
Air Consumption-Stall Flow cfm (L/s)	4.7 (2.22) - 7 (3.30)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/8" (3mm)		

Accessories	Part#
Low Flow Filter	30002
Low Flow Filter / Regulator	30001
Collet Guard	30070
Foot Pedal Control	30030

