

The light powerful 206XDME's high rotational speed removes material cleanly. The 206XDME is a featherweight that packs a punch. Get into tight areas with extended reach and governed high speed to finish cleaner and faster. Comfortable, quiet, clean cutting, the **206XDME** transforms the work experience, and delivers improved finish quality. Less repairs with no vanes. The totally oil free direct drive motor is durable and the unit weighs just 17oz.


Model 206XDME

0.3 hp
0.22kW

Double Front Bearings Standard



Automatic Brake Standard

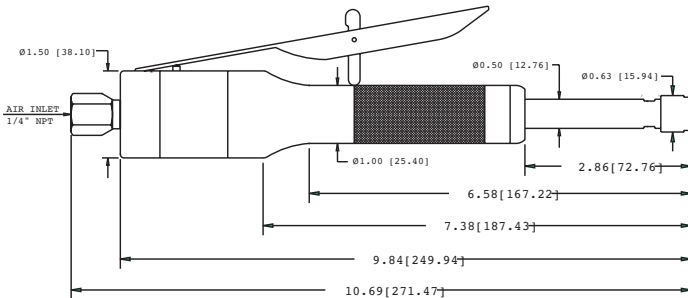

1/4"	
Speed	Part #
40,000 rpm	42008

6mm	
Speed	Part #
40,000 rpm	42009

Weight : 17.0 oz / .48 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required at rated CFM/LS. Do not use couplings or hoses less than 1/4" / 6mm diameter.

General Specifications	CE	206XDME	MADE IN THE USA
Speed RPM		40,000	
Power Rating HP (KW)		0.3 (0.22)	
Inlet Air Pressure		90 PSI (6.2 Bar)	
Air Consumption-Idle cfm (L/s)		6 (2.83)	
Air Consumption-Working cfm (L/s)		7 (3.30) - 10 (4.72)	
TIR Collet		Less than .001" (.03 mm)	
Sound Level		Less than 67 dBa	
Standard Shank Capacity		1/4" (6mm)	

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
5' Air Supply Assembly	30010