


Reach deep into cavities. More comfortable - lightweight, quiet and low vibration. Governed 30,000 rpm maintained close to rated speed up to 80% of max power of 0.8hp (0.60kW). The **525XDME's** low vibration and weight permit greater comfort at high speed. the operator only needs to use a light hand to guide the tool. Faster cleaner removal and a finer finish result.

Model 525XDME


0.8 hp
0.68 kW



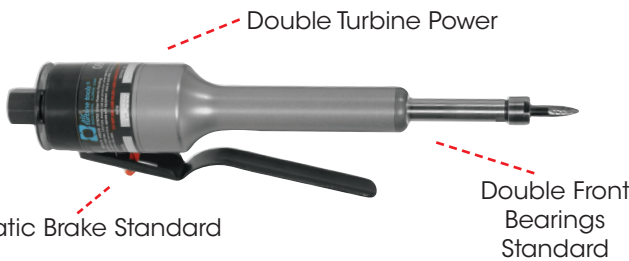

1/4"	
Speed	Part #
30,000 rpm	42554

6mm	
Speed	Part #
30,000 rpm	42555

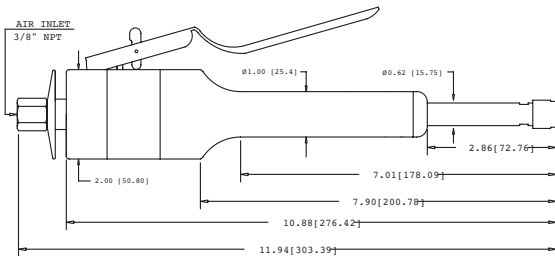Weight: 24.0oz / 0.68kg



Standard Equipment Included: 1/4" or optional 6 mm collet, collet wrenches, rear exhaust and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required. Do not use couplings or hoses less than 1/4" /6mm diameter.

General Specifications	 525XDME 
Speed RPM	30,000
Power Rating HP (KW)	0.8 (0.60)
Inlet Air Pressure	90 PSI (6.2 Bar)
Air Consumption - Idle cfm (L/s)	19 (8.97)
Air Consumption - Working cfm (L/s)	22 (10.38) - 30 (14.16)
TR Collet Held Shank	Less than .001" (.03mm)
Sound Level	Less than 67dBa
Standard Shank Capacity	1/4" (6mm)

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
5' Air Supply Assy w/Fitting	30020
8' Air Supply Assy w/Fitting	30021