


With automatic trigger switch the **201DM** "pencil" style precision tools are an incredible combination of light weight and high power. Designed with a slim shaft allows the closest possible access in hard-to-reach areas while giving great precision with low vibration. The constant speed options are 40,000, 50,000 or 65,000 RPM. There are multiple optional collets for smaller and metric applications. (Page 44) Light and durable, the **201DM** delivers exceptionally high torque. Ideal for fast, accurate close proximity work - from deburring, mold making and engraving at constant 65,000 RPM or polishing at 40,000 RPM. Almost silent exceptionally compact and comfortable. Request a demonstration today. See also Model **202**.

Model 201DM

0.2 hp
0.15 kW

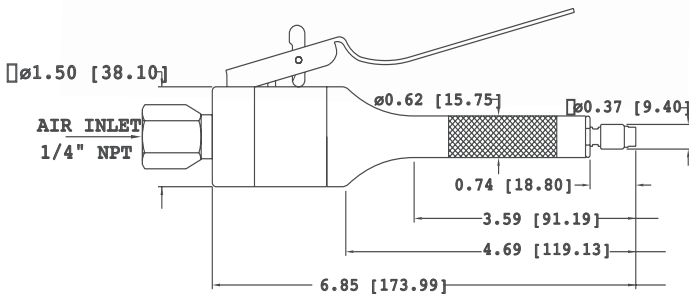

1/8"	No Brake	With Brake
Speed	Part #	Part #
40,000 rpm	32142	32146
50,000 rpm	32152	32156
65,000 rpm	32162	32166

3mm	No Brake	With Brake
Speed	Part #	Part #
40,000 rpm	32143	32147
50,000 rpm	32153	32157
65,000 rpm	32163	32167

Weight: 9 oz/.25 kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust, *trigger switch and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	201DM		
	CE	MADE IN THE USA	
Speed RPM	40,000	50,000	65,000
Power Rating HP (KW)	.15 (.11)	.2 (.15)	.2 (.15)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	3.2 (1.51)	4 (1.88)	4 (1.88)
Air Consumption-Working cfm (L/s)	4.8 (2.22) - 7 (3.30)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67 dBa		
Standard Shank Capacity	1/8" (3mm)		

Accessories

Low Flow Filter	30002
Low Flow Filter / Regulator	30001
Collet Guard	30070
Foot Pedal Control	30030
5' Air Supply Assembly	30010

