


The popular **202SV** series has a larger turbine and bearing size with the same slim light pencil design as the **201**. Note: Power from the bigger diameter turbine is up to 0.55 hp for heavier material removal with heavier duty bearings. The **202** is also available at a slower speed of 30,000 RPM for polishing, 40,000 rpm or 50,000 for deburring or 65,000 for metal work. Lightweight yet powerful, suitable for wide applications. The **202SV** is equipped with a shut-off valve located on its hose. No maintenance necessary. No vanes to repair or lubricate. Vibration acceleration 1,0 mm/s². Vibration is extremely low reducing stress and injury risk. The **202SV** is the natural progression for the **201** user who uses the tool continually. See also the **205** range with same slim barrel but higher power rating.

Model 202SV

0.55 hp
0.41 kW

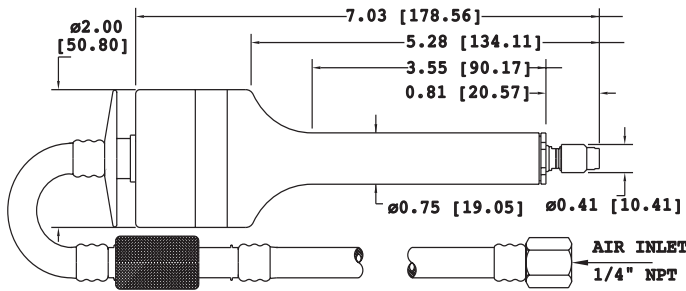

1/8"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32230	32234
40,000 rpm	32240	32244
50,000 rpm	32250	32254
65,000 rpm	32260	32264

3mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32231	32235
40,000 rpm	32241	32245
50,000 rpm	32251	32255
65,000 rpm	32261	32265

Weight: 8 oz/.23 kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	202SV			
	30,000	40,000	50,000	65,000
Speed RPM	30,000	40,000	50,000	65,000
Power Rating HP (KW)	.4 (.30)	.45 (.34)	.5 (.37)	.55 (.41)
Inlet Air Pressure	90 PSI (6.2 Bar)			
Air Consumption-Idle cfm (L/s)	10 (4.72)	13 (6.14)	14 (6.61)	14 (6.61)
Air Consumption-Working cfm (L/s)	11 (5.19) - 20 (9.44)			
TIR Collet Held Shank	Less than .001" (.03mm)			
Sound Level	Less than 67 dBA			
Standard Shank Capacity	1/8" (3mm)			

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30071
Foot Pedal Control	30030

