


The **204X** Series can be held in the wrist or fingers for removal or polishing metal or other hard materials. The high peripheral speed does the work cleaner - only a light touch needed. Let the speed do the work. This heavier duty tool features higher power at lower speeds. Power up to .04 hp (30 kW) make the **204X** powerful and light weight for durability in the tougher applications. With low vibration the **204X** reduces fatigue and stress injury yet increases accuracy. The compact and rugged **204X** is comfortable in use for long periods.

Model 204XDM

0.4 hp
0.30 kW



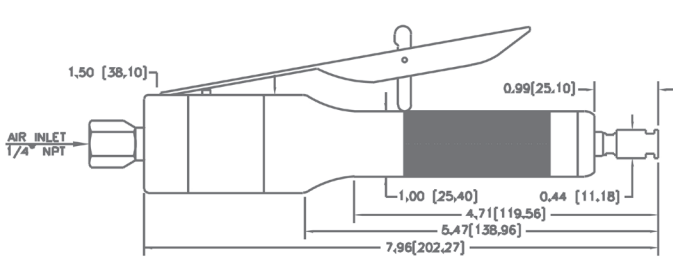

1/8"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42634	42638
40,000 rpm	42644	42648
50,000 rpm	42654	42658

3mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42635	42639
40,000 rpm	42645	42649
50,000 rpm	42655	42659

Weight: 11.5 oz / .33Kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust, trigger switch and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 204XDM 		
Speed RPM	30,000	40,000	50,000
Power Rating HP (KW)	.3 (.22)	.3 (.22)	.4 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	5 (2.36)	6 (2.83)	6 (2.83)
Air Consumption-Working cfm (L/s)	7 (3.30) - 10 (4.27)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/8" (3mm)		

Accessories

High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
5' Air Supply Assembly	30010

