


In your wrist or fingers it's so light and comfortable. The 1/4" heavy-duty **206XSV** is a powerful tool with ultra low vibration and low noise. No maintenance and no added lubrication ever. The constant high speed - within 5% of free speed at maximum power - gives you greater accuracy. No vanes to vibrate or repair. The **206XSV** has a low friction free motor with fewer moving parts. No maintenance is a big difference from vane tool technology, with a faster finer finish. At 30,000 rpm you have superb control. At 50,000 rpm you get plenty of power to match and beat other tools.

Model 206XSV

0.4 hp
30 kW



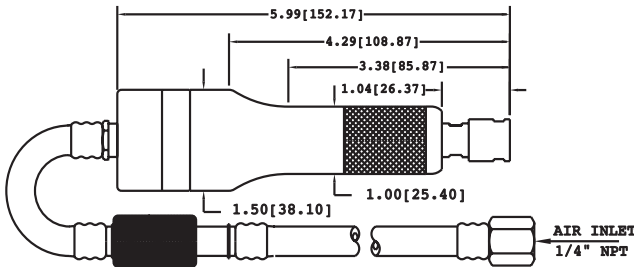

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42987	42990
40,000 rpm	42988	42991
50,000 rpm	42989	42992

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42993	42996
40,000 rpm	42994	42997
50,000 rpm	42995	42998

Weight: 8.2 oz / .23 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications		206XSV	
Speed RPM	30,000	40,000	50,000
Power Rating HP (KW)	2 (.15)	3 (.22)	4 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption - Idle cfm (L/s)	5 (2.36)	6 (2.83)	6 (2.83)
Air Consumption - Working cfm (L/s)	7 (3.30) - 10 (4.27)		
TR Collet	Less than .001" (.03 mm)		
Sound Level	Less than 67 dBa		
Standard Shank Capacity	1/4" (6 mm)		

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Foot Pedal Control	30030
5' Air Supply Assy w/Fitting	32607

