


For use in heavy-duty applications where hard use is expected for graphite finishing or Kevlar cutting, die polishing, removing welds or foundry work. Almost silent this light tool shows the power and superiority of the governed turbine. The **230DM** tools incorporate heavy duty bearings and have collet capacities of 1/4" or 6mm. The vibration level is only 0.9 mm/s<sup>2</sup> - minimal. The **230SV** and **230DM** may be fitted to the shop's hose assembly or our air supply assembly with fittings. The **230DM** has a deadman's handle for quick, easy shut-off. The **230SV** is equipped with a hose shut-off valve conveniently located at the top of the tool. These tools will perform heavy material removal tasks reliably, faster, cleaner and with greatly reduced fatigue and injury. Operators love this tool - Try it and see why.

**Model 230DM**

**0.88 hp**  
**0.66 kW**

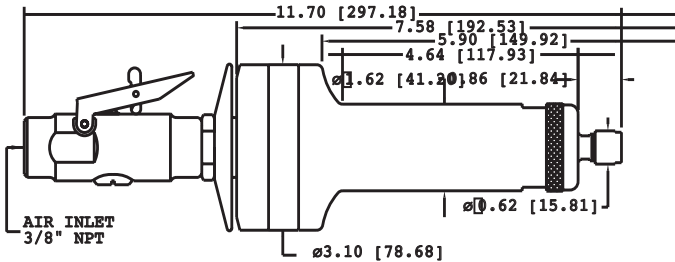

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32722	32728
30,000 rpm	32732	32738
40,000 rpm	32742	32748

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32723	32729
30,000 rpm	32733	32739
40,000 rpm	32743	32749

**Weight: 32.3 oz / 1.0 kg**

**Standard Equipment Included:** 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, trigger switch and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	CE	230DM	MADE IN THE USA
Speed RPM		25,000	30,000 40,000
Power Rating HP (KW)		.76 (.57)	.83 (.62) .88 (.66)
Inlet Air Pressure		90 PSI (6.2 Bar)	
Air Consumption-Idle cfm (L/s)		13 (6.14)	14 (6.61) 14 (6.61)
Air Consumption-Working cfm (L/s)		14 (6.61) - 35 (16.52)	
TIR Collet Held Shank		Less than .001" (.03mm)	
Sound Level		Less than 67dBa	
Standard Shank Capacity		1/4" (6mm)	

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30073
6' Air Supply Assembly	30012

