


Almost silent, this light tool shows the power and superiority of the governed turbine. The **230** tools incorporate heavy duty bearings and have collet capacities of 1/4" or 6mm. For use in heavy-duty applications where hard use is expected for graphite finishing or Kevlar cutting, die polishing, removing welds or foundry work. The vibration level is only 0,9 mm/s² - minimal. The **230SV** and **230DM** may be fitted to the shop's hose assembly or our air supply assembly with fittings. The **230DM** has a deadman's handle for quick, easy shut-off. The **230SV** is equipped with a hose shut-off valve conveniently located at the top of the tool. These tools will perform heavy material removal tasks reliably, faster, cleaner and with greatly reduced fatigue and injury. Operators love this tool - demonstrate it and see why!

Model 230SV

0.88 hp

0.66 kW

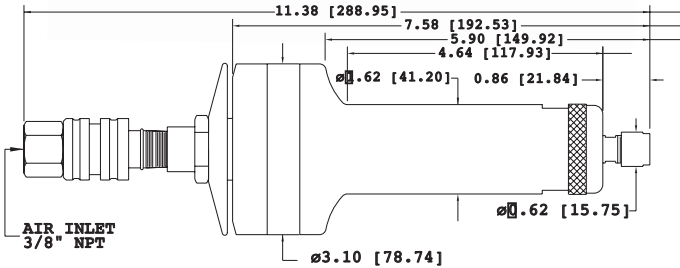



1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32724	32726
30,000 rpm	32734	32736
40,000 rpm	32744	32746

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32725	32727
30,000 rpm	32735	32737
40,000 rpm	32745	32747

Weight: 37.3oz / 1.0kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, slide valve and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 230SV 		
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	.76 (.57)	.83 (.62)	.88 (.66)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption - Idle cfm (L/s)	13 (6.14)	14 (6.61)	14 (6.61)
Air Consumption - Working cfm (L/s)	14 (6.61) - 35 (16.52)		
TR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
6' Air Supply Assy w/Fitting	30012
12' Air Supply Assy w/Fitting	30013

