


Greater power for fast clean finishing with a quiet no maintenance precision tool. With up to 1.4 hp (1.04kW), the Model **230XSV** Series tools have collet capacities of 1/4" and 6mm. Developed for use in heavy-duty applications from die finishing, slotting to weld removal. Where extra power is needed this tool excels and is exceptionally comfortable. The **230XSV** is reliable due to its few moving parts and friction-free turbine motor. The **230XSV** also incorporates heavy-duty bearings within a larger, thick housing. The **230XSV** and **230XDM** may be fitted to the shop's or our air supply assembly. With our highest horsepower rating the **230X** Series will perform heavy material removal and finishing tasks cleaner and quicker. Router options available.

**Model 230XSV**

1.4 hp  
1.04 kW



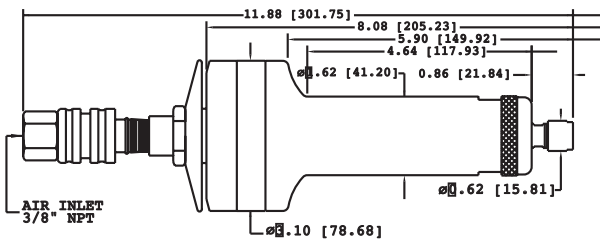

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	42724	42726
30,000 rpm	42734	42736
40,000 rpm	42744	42746

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	42725	42727
30,000 rpm	42735	42737
40,000 rpm	42745	42747

**Weight: 39 oz / 1.07 kg**

**Standard Equipment Included:** 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, slide valve and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 <b>230XSV</b> 		
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	1.2 (.90)	1.3 (.98)	1.4 (1.04)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	16 (7.55)	17 (8.02)	18 (8.50)
Air Consumption-Working cfm (L/s)	19 (8.97) - 30 (14.16)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

**Accessories**

	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30073

