


Finishing or trimming metal? Deburring aluminum or steel? The light, powerful and comfortable **525DM** "pencil" style tools have speed ranges of 30,000 and 40,000 RPM, with collet capacities of 1/4" or 6mm. The slim barrel styling provides easy access for hard-to-reach areas. Optional collets are available for varied applications. The **525DM** has a deadman's handle for quick, easy shut-off.

Model 525DM

.45 hp
0.34 kW



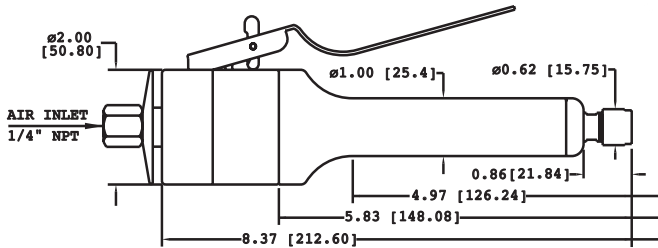

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32532	32536
40,000 rpm	32542	32546

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32533	32537
40,000 rpm	32543	32547

Weight: 19.5 oz/ .55 kg

Standard Equipment Included: 1/4" or optional 6 mm collet, collet wrenches, rear exhaust trigger switch and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 525DM 	
Speed RPM	30,000	40,000
Power Rating HP (KW)	.4 (.30)	.45 (.34)
Inlet Air Pressure	90 PSI (6.2 Bar)	
Air Consumption-Idle cfm (L/s)	10 (4.72)	13 (6.14)
Air Consumption-Working cfm (L/s)	11 (5.19) - 20 (9.27)	
TIR Collet Held Shank	Less than .001" (.03mm)	
Sound Level	Less than 67dBa	
Standard Shank Capacity	1/4" (6mm)	

Accessories

	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
5' Air Supply Assembly	30010

