


Exceptionally powerful and tough! The **525XSV** delivers extra power at lower speeds. Double turbine power combines with lightweight, low vibration, low noise, operator comfort and provides greater accuracy and a finer high speed finish. The **525XSV** weighs only 15.5 oz (.44 kg) with power up to .9 hp (.68 kW). The power to weight ratio is extraordinary in this tool! The constant high speed **525XSV** enables you to work on hard-to-reach applications for fast removal or finishing - comfortably with a light touch directing the tool. Air turbine tools[®] oil free mechanism eliminates carcinogenic corrosive oil contamination and lubrication costs. With fewer moving parts there is no maintenance and repair costs are reduced.

Model 525XSV

0.9 hp
0.68 kW



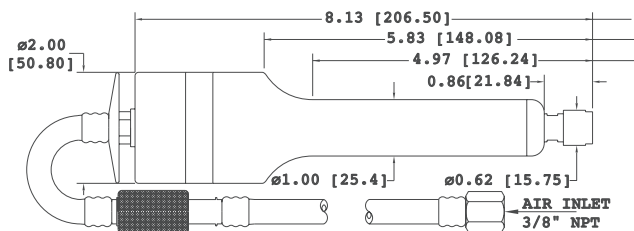

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42530	42534
40,000 rpm	42540	42544

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42531	42535
40,000 rpm	42541	42545

Weight: 15.5 oz / .44 kg

Standard Equipment Included: 1/4" or optional 6 mm collet, collet wrenches, rear exhaust 5' air supply assembly with slide valve and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 525XSV 	
Speed RPM	30,000	40,000
Power Rating HP (KW)	.8 (.60)	.9 (.68)
Inlet Air Pressure	90 PSI (6.2 Bar)	
Air Consumption - Idle cfm (L/s)	19 (8.97)	20 (9.44)
Air Consumption - Working cfm (L/s)	22 (10.38) - 30 (14.16)	
TR Collet Held Shank	Less than .001" (.03mm)	
Sound Level	Less than 67dBa	
Standard Shank Capacity	1/4" (6mm)	

Accessories

High Flow Filter	30004
High Flow Filter / Regulator	30003
Foot Pedal Control	30030
5' Air Supply Assy w/Fitting	32607

