


Ideal for lab mills, lathes and swiss automation, and all fixture and robotic applications. Reach deep and run faster for accelerated production and cleaner cutting action. Lower vibration results from fewer moving parts in this direct drive, oil free geared double turbine powered unit. Mountable area of 30mm by 38mm.

Model 702MX

0.40 hp
0.30 kW

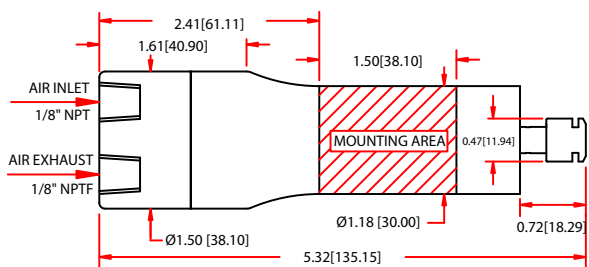

General Specifications	702MX		
	CE	MADE IN THE USA	
Speed RPM	40,000	50,000	65,000
Power Rating HP (KW)	.30 (.22)	.30 (.22)	.40 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	5 (2.36)	6 (2.83)	6 (2.83)
Air Consumption-Working cfm (L/s)	7 (3.30) - 10 (4.72)		
TIR Collet Held Shank	0.0002" (0.005mm)		
Sound Level	Less Than 67 dBa		
Standard Shank Capacity	1/8" (3mm) or 1/4" (6mm)		

ER-8

1/8"		3mm	
Speed	Part #	Speed	Part #
40,000 rpm	70024	40,000 rpm	70025
50,000 rpm	70028	50,000 rpm	70029
65,000 rpm	70032	65,000 rpm	70033

ER-11

1/4"		6mm	
Speed	Part #	Speed	Part #
40,000 rpm	70026	40,000 rpm	70027
50,000 rpm	70030	50,000 rpm	70031
65,000 rpm	70034	65,000 rpm	70035

Weight: 25 oz / 0.71 kg

Standard Equipment: ER-8 or ER-11 Collet System, Keys, Wrenches, included in a carrying case. 1/8", 3mm, 1/4" or 6mm collet, Oil free 90 psi/6.2 bar dry, clean air supply required.

Accessories	Part#
High Flow Filter / Regulator / Extractor	30008