


In your wrist or fingers it's so light and comfortable! The 1/4" heavy-duty **206XDM** is a powerful tool with ultra low vibration and low noise. No maintenance and no lubrication ever. The constant high speed - within 5% of free speed at maximum power - gives you greater accuracy. No vanes to lubricate or repair. The **206XDM** has a low friction free motor with fewer moving parts. No maintenance is a big difference from vane tool technology, with a finer faster finish. At 30,000 rpm you have superb control. At 50,000 rpm you get power to match and beat other tools.

Model 206XDM



0.4 hp
0.30kW

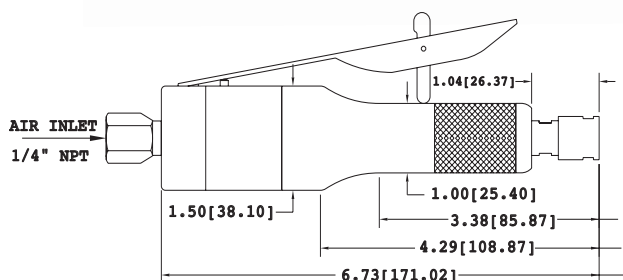

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42975	42978
40,000 rpm	42976	42979
50,000 rpm	42977	42980
6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42981	42996
40,000 rpm	42982	42997
50,000 rpm	42983	42998

Weight : 14.25 oz / .86 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, trigger switch and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 206XDM 		
Speed RPM	30,000	40,000	50,000
Power Rating HP (KW)	.2 (.15)	.3 (.22)	.4 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	2 (.94)	2 (.94)	6 (2.84)
Air Consumption-Stall Flow cfm (L/s)	16 (7.56)		
TIR Collet	Less than .001" (.03 mm)		
Sound Level	Less than 67 dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
5' Air Supply Assembly	30010

