


Greater power for fast clean finishing with a quiet no maintenance precision tool. With up to 1.4 hp (1.04kW), the Model **230XSV** Series tools have collet capacities of 1/4" and 6mm. Developed for use in heavy-duty applications from die finishing, slotting to weld removal. Where extra power is needed this tool excels and is exceptionally comfortable. The **230XSV** is reliable due to its few moving parts and friction-free turbine motor. The **230XSV** also incorporates heavy-duty bearings within a larger, thick housing. The **230XSV** and **230XDM** may be fitted to the shop's or our air supply assembly. With our highest horsepower rating the **230X** Series will perform heavy material removal and finishing tasks cleaner and quicker. Router options available.

Model 230XSV

1.4 hp
1.04 kW



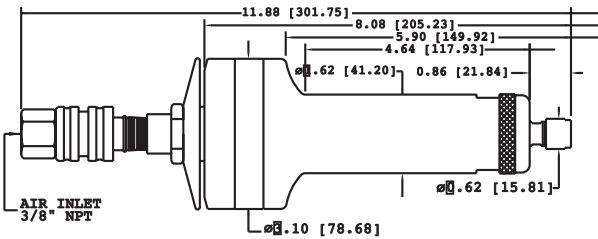

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	42724	42726
30,000 rpm	42734	42736
40,000 rpm	42744	42746

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	42725	42727
30,000 rpm	42735	42737
40,000 rpm	42745	42747

Weight: 39oz / 1.07kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, slide valve and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 230XSV 		
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	1.2 (.90)	1.3 (.98)	1.4 (1.04)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption - Idle cfm (L/s)	16 (7.55)	17 (8.02)	18 (8.50)
Air Consumption - Working cfm (L/s)	19 (8.97) - 30 (14.16)		
TR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
6' Air Supply Assy w/Fitting	30012
12' Air Supply Assy w/Fitting	30013

